



ASSEMBLY INSTRUCTION MODEL #ARC-1905-SA-CL-MWP




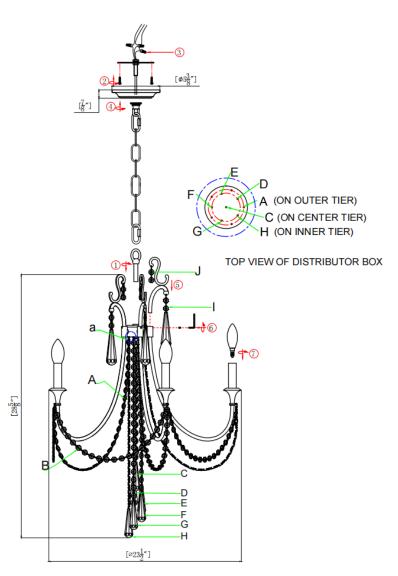



All electrical components must be installed by a licensed electrician in accordance with the National

Electric Code and the appropriate



You will need 5 Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE This fixture is Dry rated.

How to Install

- Please place the fixture parts on a soft-cloth covered platform before installation. Do a complete inventory of all parts and components before you start installing.
- Insert a scroll onto the top of each arm and secure using the provided screw and wrench.
- 3. Screw the top stem onto the top of the fixture.
- 4. Open the quick link at the end of the chain and fasten the chain to fixture loop.
- 5. Secure mounting bar to outlet box with machine screw.
- 6. Connect wires with wire connector.
- Raise the chain allowing for the screw collar loop to protrude through the holes on canopy then secure with collar ring.
- 8. Install light bulb (not included).
- 9. Hang crystal as illustrated.

Crystal sets

A.5sets 30*14mm

B.5sets 20*14mm

C.1set 14*14mm+1*76mm

D.1set 17*14mm+1*76mm E. 1set 18*14mm+1*76mm

F. 1set 19*14mm+1*76mm

G.1set 20*14mm+1*76mm


H.1set 21*14mm+1*76mm I. 5sets 2*14mm+1*76mm

J. 5sets 2*14mm

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov



PART NUMBER MODEL #ARC-1905-SA-CL-MWP

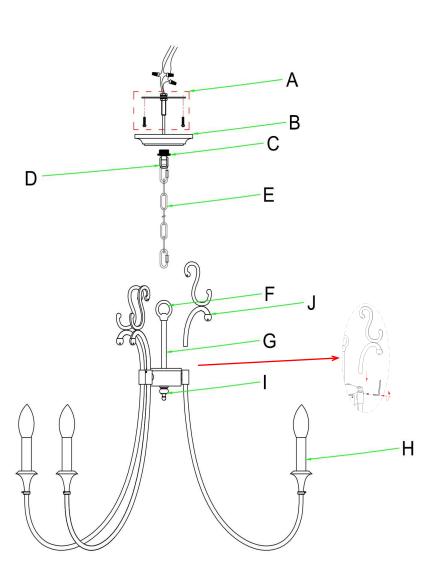

Part Number

Part Numbers

- A. (1)-Mounting Hardware
- B. (1)-Canopy;ø5 3/8" (XBN1905SACAN5.375IN)
- C. (1)-Screw Collar Loop Ring
- D. (1)-Screw Collar Loop
- E. (1)-Chain;ø1/5*L72" (XBN1905SACHA5MM)
- F. (1)-Fixture Loop;ø2"
- G. (1)-Top Stem;L2"
- H. (5)-Candle Sleeve;L2 4/5" (XBN1902SACDL2.8IN)
- I. (1)-Finial;H1 1/5" (XBN1900SAFIN)
- J. (5)-Scroll