

Oglesby Flush Mount

7501903 | 1.0

GENERATION LIGHTING

CEILING

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.generationlighting.com


© 2019 Generation Lighting. All rights reserved.
The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

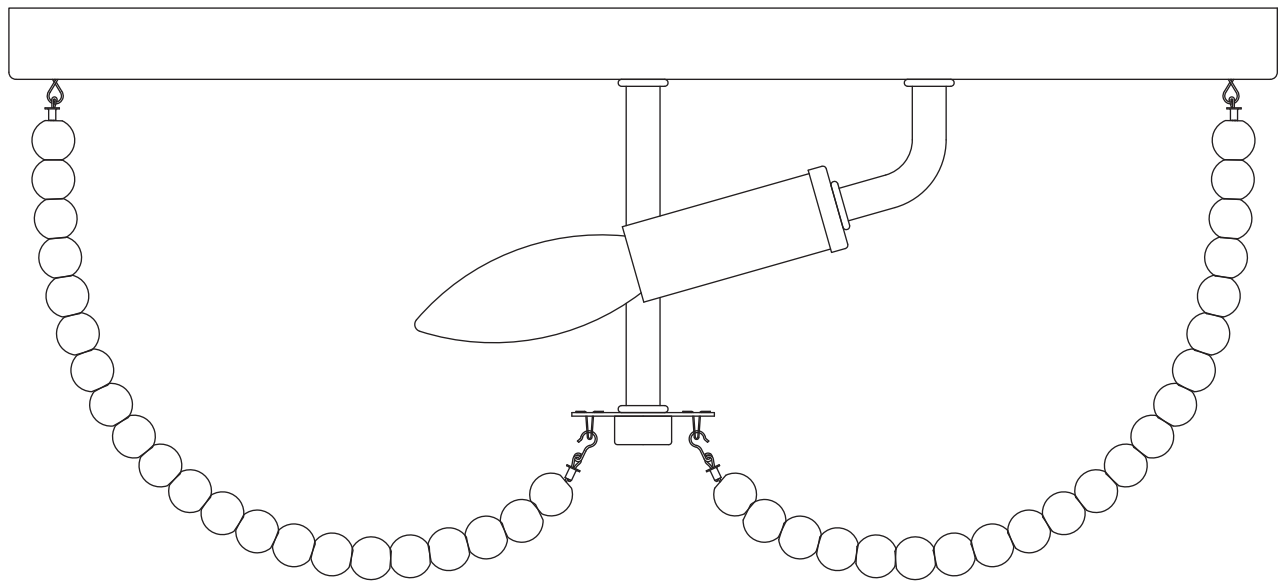

SAVE THESE INSTRUCTIONS!

Install the Fixture

IA

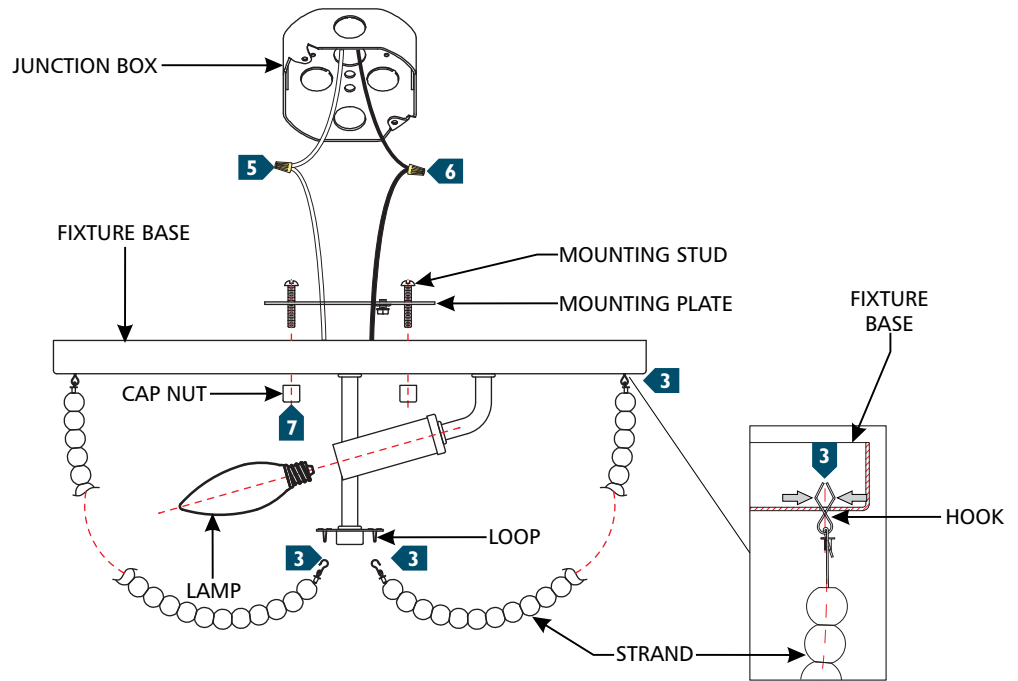

- 1 Secure the mounting plate to the junction box.
- 2 Screw the lamps to the sockets. Refer to the label on the socket for max wattage information.
- 3 Install the strands by pinching the hooks at the ends of the strands, then inserting them into the fixture base, and releasing them to secure in place. Hook the remaining ends of the strands to the loops on the bottom of the fixture.
- 4 Connect the fixture ground wire to a suitable ground with accordance to local electrical codes.
- 5 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 6 Connect the black fixture wire to the hot power line wire with a wire nut.
- 7 Neatly tuck the wires into the junction box, mount the fixture base onto the mounting studs, and secure it in place by screwing the cap nuts onto the studs.