

Assembly Instructions: 3184-M1L (Teagan)

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, please contact the place of purchase.

PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap.

1. Take the mounting strap assembly from the parts bag. Mounting strap (A) contains several threaded holes. Nipple (F) should be attached to the mounting strap (A) with washer (C) and hex nut (D) in place.
2. Pull the house wires through the center of mounting strap (A). Place mounting strap (A) over the junction box and secure mounting strap (A) to the junction box with mounting screws (B) and a screwdriver. Tighten the screws securely. Pull house wires through the center of the mounting strap and nipple.
3. Unscrew canopy loop collar (I) and let the collar and canopy (G) slide down over the chain. Thread canopy loop (H) onto nipple (F) to ensure a snug fit and proper canopy height. Remove canopy (G) and canopy loop (H) for later use.

ASSEMBLING THE FIXTURE

4. Measure to determine the correct number of chain links needed for proper hanging height. If necessary, use a pair of pliers to open and remove any excess chain. Attach one chain connector (K) to each end of the chain (J). Use one of the chain with chain connector to attach the chain to the top loop (L) and close chain connector to secure. Feed the fixture wires through the chain (every three links or so) and pull the wires until taut. Next, use the remaining free chain with chain connector to attach the chain to canopy loop (H). Pass the fixture wires through chain loop (H), canopy (G), and nipple (F). Pull the wires until taut. Check that the fixture is at the desired height.

CONNECTING THE WIRES


5. Have an assistant support the weight of the fixture while completing the wiring. Cut away excess wire leaving 8 to 10 inches of excess wire. Attach the fixture's wires to the house wires which were pulled earlier from the junction box through the mounting strap (A). Connect black to black (or smooth); white to white (or ribbed); ground to ground (green or copper). Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) coming from the junction box, locate ground screw (E) on the mounting strap and wrap the fixture's ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket. Tuck all wires neatly into the junction box.

FINISHING THE INSTALLATION

6. Place top loop (L) onto the threaded nipple (M) on the fixture body. As shown in the figure, use screw (P) and the provided Allen Key to secure the lamp holder (O), wooden frame (Q) and rod (N) together.
7. Lift the wooden frame (R) up to the bottom of rod (N), then use screw (P) to tighten and secure the frame to the fixture body. Screw on socket cover (S) over the exposed socket.

Install a light bulb (not provided) in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage.

Your installation is now complete. Turn on the power and test the fixture.

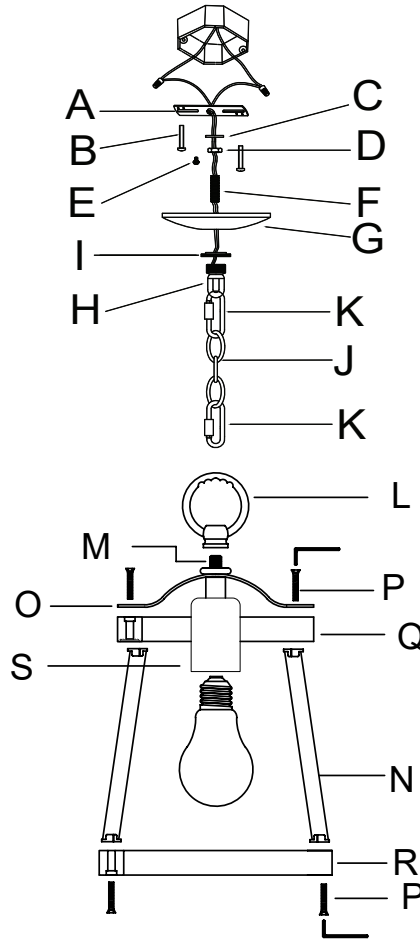

How to Identify the Fixture's Wires		
Hot	Neutral	Ground
Smooth	Ribbed	Bare Metal, Green, or Green Inner Thread
Black	White	
Black Inner Thread	White Inner Thread	

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.

