


PHYLTRICH[®]

Defining Luxury Since 1959

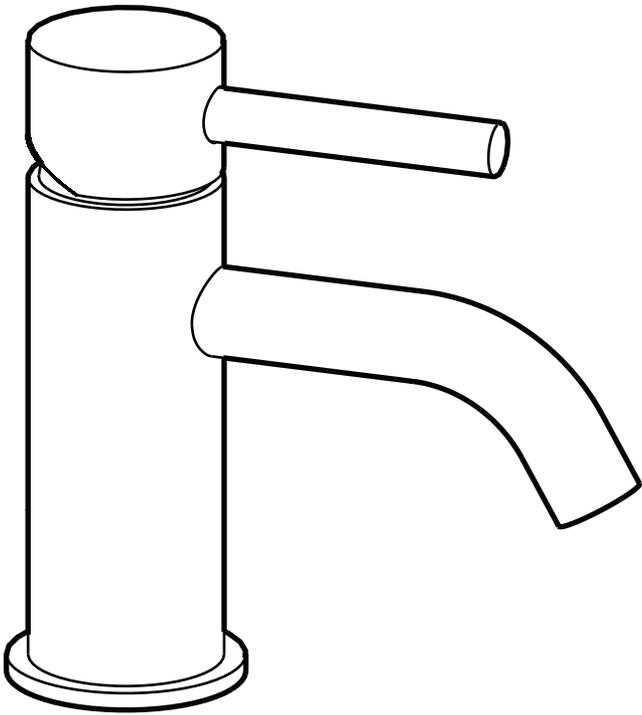

INSTALLATION INSTRUCTIONS FOR BASIC II SINGLE HOLE LAV FAUCET #D230s

GENERAL CHARACTERISTICS

WE RECOMMEND THAT ALL PLUMBING PRODUCTS BE INSTALLED BY A LICENSED PROFESSIONAL

IMPORTANT: Thoroughly read instructions before installation.

VALVE SPECIFICATION

Recommended supply pressure = **20 to 80 psi (1,38-5,52 bar)**

Recommended hot water supply temperature = **120° to 140°F (48°-60°C)**

Operating pressures between **hot and cold supplies** should vary no more than **30 psi (2,07 bar)**. If water pressure exceeds **70 psi (4,83 bar)**, install a pressure reducing valve.

Ensure the mixing valve is in compliance with local plumbing codes when setting the temperature on the water heater.

It is the installer's responsibility to verify **correct temperature setting** to prevent any risk of scalding prior to consumer use.


25mm diameter size open type cartridge

Opening angle of the lever = 25°

Mixing rotation of the lever = 100°

Aerator flow rate = 1.2 gpm (4.5 L/min)

OVERALL DIMENSIONS

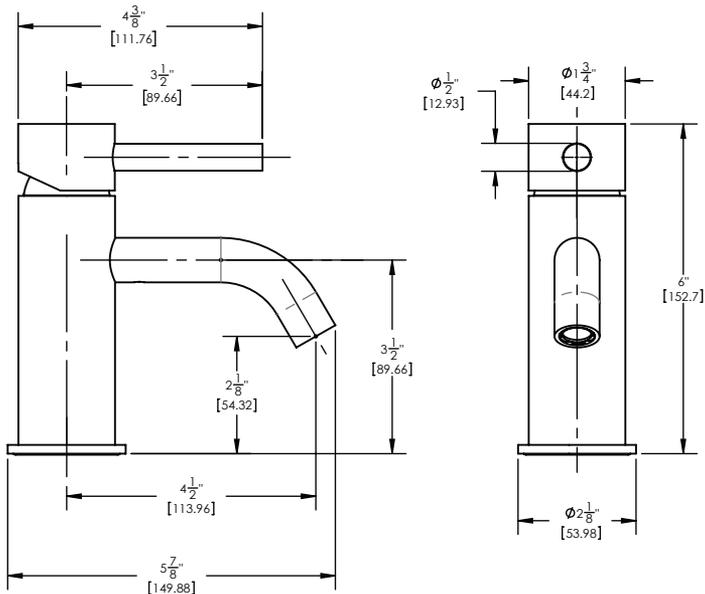

GENERAL CHARACTERISTICS


Position lavatory faucet as shown. The **handle and spout** face forward and the factory installed mounting stud is in the front.

Ensure **escutcheon base and o-ring seal is in place** before feeding the supply hoses through the 1 3/8" mounting hole.

From below the deck, install the **horseshoe washer** and **locknut** onto the mounting stud. Before final tightening, adjust the lavatory faucet so it is centered and covers the 1 3/8" mounting hole completely.

Tighten locknut. (**Do not overtighten**)

Attach the **hot (red)** and **cold (blue)** supply hoses to the angle supply valves (not supplied).

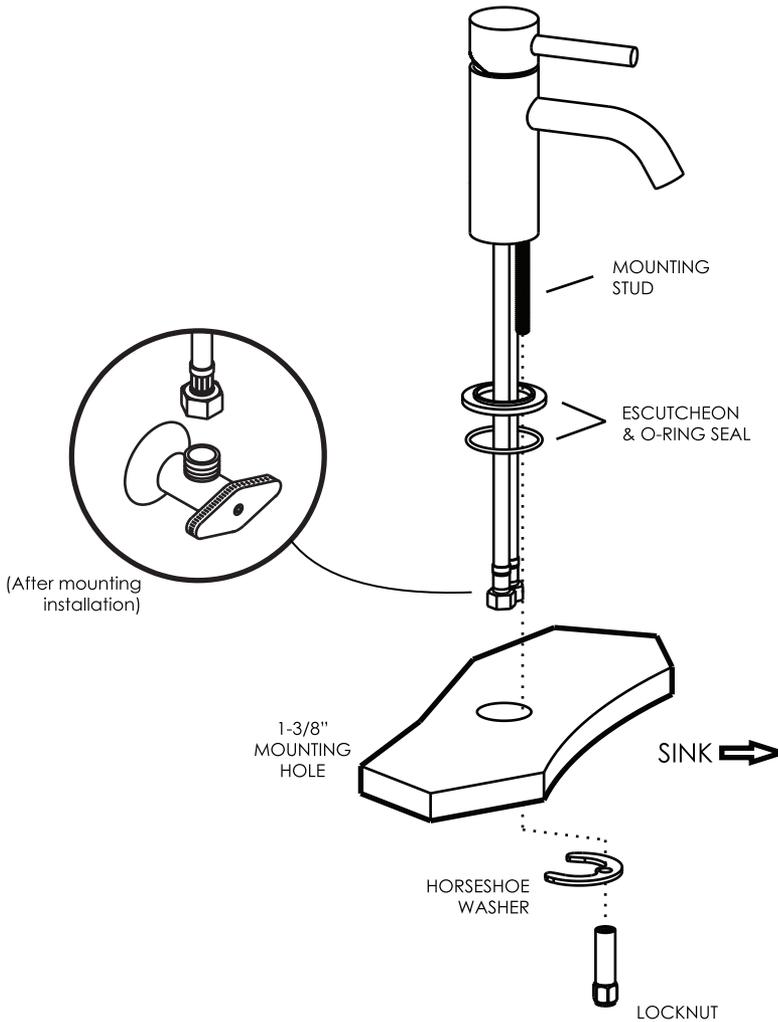

DRAIN ASSEMBLY

Insert ***Pre-assembled drain rim (A)** into the basin placing the **Teflon washer (B)** under the rim. From below slip on **washer (C)** onto the bottom thread of the drain rim and secure to basin with **drain nut and washer (D & E)** then insert **Tail tube drain (F)** onto the **drain rim (A)**

