





Sempria® LED E Series

Linear LED fixture with **Flat** or **Angled** Housings and a slim profile for multiple applications

Flat Housing

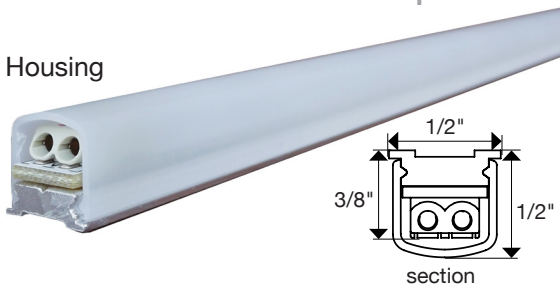

Angled Housing

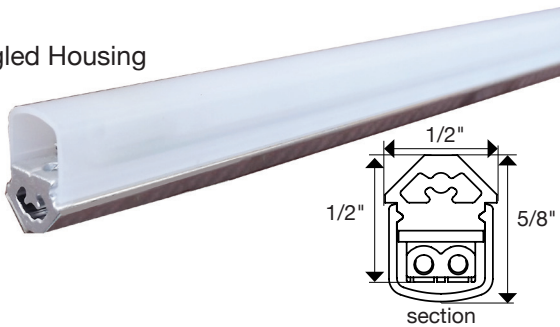

APPLICATIONS

- Toe/Soffit Lighting
- Cove Lighting
- Interior Cabinet Lighting
- Display Case Lighting

FEATURES

- 50,000 hour LED life at 70% lumen maintenance
- Compact and versatile
- Frosted lens
- Poke-home connectors for easy installation
- 3 Year limited warranty
- No special gap-connectors needed
- No UV or IR
- Dimmable (with compatible dimmer)

SPECIFICATIONS

Construction Materials:	Extruded aluminum (heatsink), IR Acrylic (lens)
Wattage:	1/8 Watt LEDs
Color Temp (Kelvin):	2700K (Warm White) or 3000K (Neutral White)
CRI:	90+
LED Beam Angle:	120°
Input Voltage:	15 Volt DC
LED Spacing:	1 1/2"
Mounting:	Double Stick Tape / Screws included
Max Run:	Refer to driver specs
Wiring:	18/2 solid (recommended)
Environment:	Dry and damp locations

1/8 watt SEMPRIA® E SERIES

PART NUMBER	DIMENSIONS	TOTAL WATTS	LUMENS <small>Based on 3000K (approx. per fixture)*</small>	KELVIN TEMP
FLAT HOUSING 1/8 WATT				
SF9E-6UN1-Temp	6 1/2" x 1/2" x 1/2"	1W	87	2700K, 3000K
SF9E-12UN2-Temp	12 1/2" x 1/2" x 1/2"	2W	174	2700K, 3000K
SF9E-18UN3-Temp	18 1/2" x 1/2" x 1/2"	3W	261	2700K, 3000K
SF9E-24UN4-Temp	24 1/2" x 1/2" x 1/2"	4W	348	2700K, 3000K
SF9E-30UN5-Temp	30 1/2" x 1/2" x 1/2"	5W	435	2700K, 3000K
SF9E-36UN6-Temp	36 1/2" x 1/2" x 1/2"	6W	522	2700K, 3000K
SF9E-42UN7-Temp	42 1/2" x 1/2" x 1/2"	7W	609	2700K, 3000K
SF9E-48UN8-Temp	48 1/2" x 1/2" x 1/2"	8W	696	2700K, 3000K
ANGLED HOUSING 1/8 WATT				
SA9E-6UN1-Temp	6 1/2" x 1/2" x 5/8"	1W	87	2700K, 3000K
SA9E-12UN2-Temp	12 1/2" x 1/2" x 5/8"	2W	174	2700K, 3000K
SA9E-18UN3-Temp	18 1/2" x 1/2" x 5/8"	3W	261	2700K, 3000K
SA9E-24UN4-Temp	24 1/2" x 1/2" x 5/8"	4W	348	2700K, 3000K
SA9E-30UN5-Temp	30 1/2" x 1/2" x 5/8"	5W	435	2700K, 3000K
SA9E-36UN6-Temp	36 1/2" x 1/2" x 5/8"	6W	522	2700K, 3000K
SA9E-42UN7-Temp	42 1/2" x 1/2" x 5/8"	7W	609	2700K, 3000K
SA9E-48UN8-Temp	48 1/2" x 1/2" x 5/8"	8W	696	2700K, 3000K

POWER SUPPLIES

PART NUMBER	DESCRIPTION
TLD-24WSI	24W plug-in 15VDC call for dimming options
TLD-D30WSO	30W hardwire 15VDC
TLD-D45WSO	45W hardwire 15VDC
TLD-D60WSO	60W hardwire 15VDC
TLD-D75WSO	75W hardwire 15VDC

INSTALLATION COMPONENTS

PART NUMBER	DESCRIPTION
SP-20FT-18/2	20 foot spool of 18/2 awg solid wire
SP-50FT-18/2	50 foot spool of 18/2 awg solid wire
SF9-WW-48	48" Sempria® LED Universal WireWay for FLAT HOUSING
SG9-IL-CONN	In-line Connector

DIMMING OPTIONS

PART NUMBER	DESCRIPTION
DVELV-300P	300W Diva slide dimmer
DVELV-303P	300W Diva slide dimmer 3-way
MAELV-600-Color	Maestro electronic smart dimmer
MA-R-Color	Preset smart remote (for multiple switching)

Task Lighting retains the right to modify the design of our products without prior notice

