

Assembly Instructions: 1090-3P

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, please contact the place of purchase.

PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap.


1. From the parts bag remove the mounting strap (B) assembly. Two of mounting screws (A & D) should be attached to mounting strap (B). You may need to tighten nuts (C) that hold these screws in place. Place mounting strap (B) over the junction box so that mounting screws (A) are vertical, and in alignment with the hole locations on the fixture's canopy (F). Secure mounting strap (B) to the junction box with mounting screws (D) and a screwdriver. Tighten the screws securely. Pull house wires through the center of the mounting strap.

ASSEMBLING THE FIXTURE

2. Feed fixture wires from nipple (U), column (Q), through connector (P) and nipple (O). Thread the bottom of column (Q) onto nipple (U). Pull the wires until taut. Then thread column (Q) into the connector (P). Carefully pull the fixture's wire coming out nipple (O) until taut.

3. Attach glass shade (R) by sliding over nipple (O). Feed fixture wires through washer (N), plastic washer (M), and hex nut (L) in the order shown in the diagram. Secure glass shade (R) to fixture body using washer (N), plastic washer (M), and hex nut (L) in the order shown in the diagram. Next, cover the hex nut (L) with small cap (K). Pull the fixture wires until taut.

4. Measure to determine the correct of the number of rods (I & J) needed for proper hanging height. Carefully feed the fixture wires through rods (I & J). Pull wires until taut and thread all rods together to secure. Thread one end of the rods onto small cover (K) and nipple (O). Push fixture wires through swivel (H) until it protrudes out of canopy (F). Thread the remaining rod end onto swivel (H). Carefully pull the wires until taut.

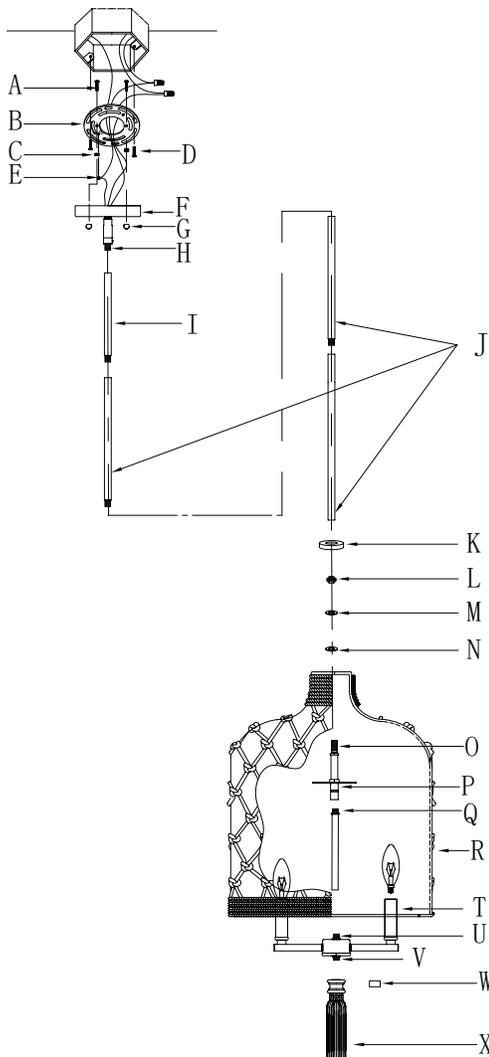

| How to Identify the Fixture's Wires | | |
|-------------------------------------|--------------------|--|
| Hot | Neutral | Ground |
| Smooth | Ribbed | Bare Metal, Green, or Green Inner Thread |
| Black | White | |
| Black Inner Thread | White Inner Thread | |

CONNECTING THE WIRES

5. Have an assistant support the fixture's weight while completing the wiring. Refer to the wiring diagram and attach the fixture's wires to the power supply wires from the junction box. Connect Hot to Hot (transparent wire with black inner thread, black, or smooth wire) Neutral to Neutral (transparent wire with white inner thread, white, or ribbed wire), and Ground to Ground (transparent wire with green inner thread, green wire, or copper). Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no house ground wire coming from the junction box, locate ground screw (E) on the mounting bracket/mounting strap and wrap the fixture's ground wire around the ground screw. Use a screwdriver to tighten the top of ground screw (E) onto the wires and into the mounting bracket/mounting strap. Tuck the wires into the junction box.

FINISHING THE INSTALLATION

6. Raise canopy (F) over mounting strap (B) so that the holes in mounting strap (B) line up with the holes in canopy (F). Thread deco nuts (G) onto the exposed threads of mounting screws (A) until the canopy (F) is snug against the ceiling. Attach either finial iron nut (W), or rope detail (X), onto the nipple (V) for different style options.

Install bulbs (not provided) into sockets (T) in accordance with the fixture's specifications. Do not exceed the maximum wattage.

Your installation is now complete. Turn on the power and test the fixture.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.