

# Whare Wall

EW1151 | 1.0

GENERATION LIGHTING

## Wall

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

GENERATION LIGHTING


7400 Linder Ave, Skokie, IL 16077

800.969.3347

[www.generationlighting.com](http://www.generationlighting.com)

© 2020 Generation Lighting. All rights reserved.


The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

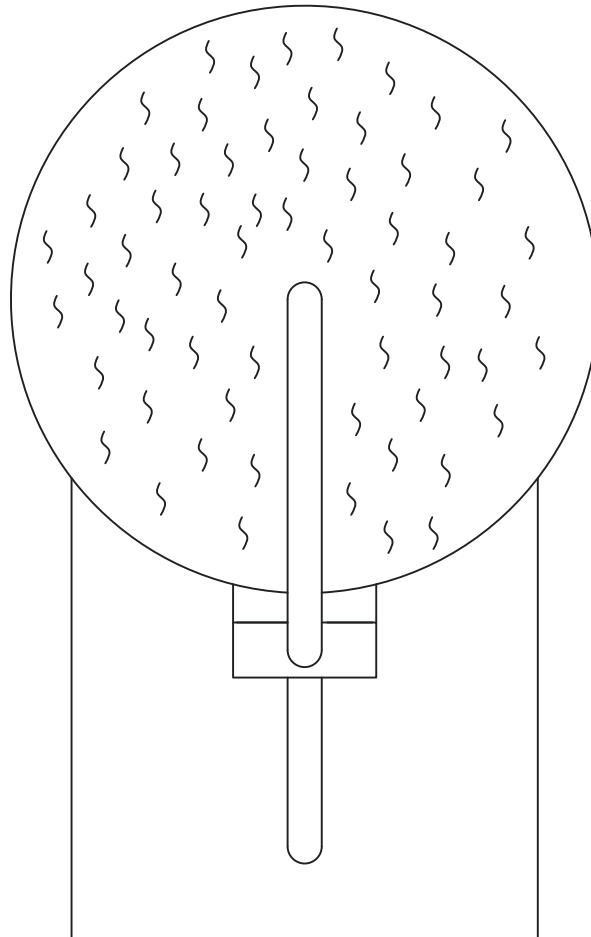

**SAVE THESE INSTRUCTIONS!**

# Install the Fixture

IA

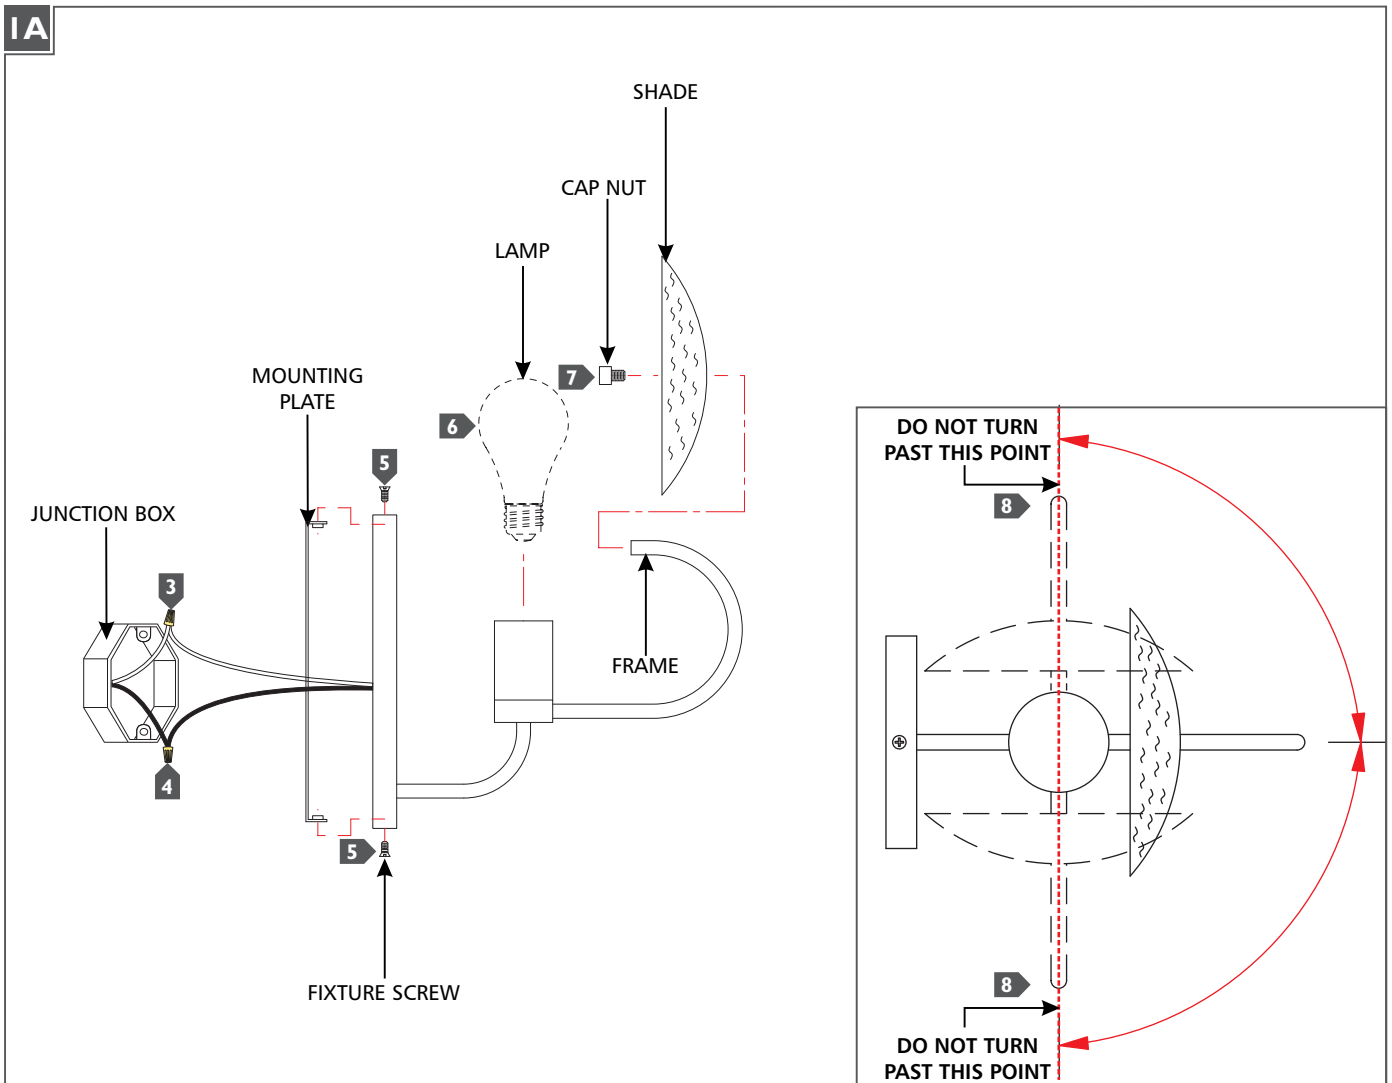

- 1 Secure the mounting plate to the junction box.
- 2 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 3 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4 Connect the black fixture wire to the hot power line wire with a wire nut.
- 5 Neatly tuck the wiring into the junction box, place the fixture base onto the mounting plate, and secure it in place using fixture screws.
- 6 Screw the lamp into the socket. Refer to the label on the socket for max wattage information.
- 7 Install the shade to the frame and secure it in place using the cap screw.
- 8 **Optional:** Adjust the shade by turning it left or right until desired position is achieved. **Do not turn the shade past the point indicated by red dotted line.**